arXiv:1212.3883v1 [cs.IT] 17 Dec 2012

BAYES INFORMATION-THEORETIC RADAR WAVEFORM DESIGN AND DELAY-DOPPLER RESOLUTION FOR EXTENDED TARGETS

Mir H. Mahmood * *Mark R. Bell, Fellow, IEEE*†

Purdue University
School of Electrical and Computer Engineering
West Lafayette, Indiana 47907
{mmahmood *, mrb †} @ purdue.edu

ABSTRACT

In this paper, we consider the problem of information-theoretic waveform design for active sensing systems such as radar for extended targets. Contrary to the popular formulation of the problem in the estimation-theoretic context, we are rather interested in a Bayes decision theoretic approach where a target present in the environment belongs to two or more classes whose priors are known. Optimal information theory based transmit waveforms are designed by maximizing mutual information (MI) between the received signal and the target impulse response, resulting in a novel iterative design equation. We also derive signal to noise ratio (SNR) maximization based waveforms. In an effort to quantize the benefits of such a design approach, the delay-Doppler ambiguity function of information-theoretic waveforms are presented and is compared with Barker codes of similar time-bandwidth product. It is found that the ambiguity function of information-theoretic waveforms has very sharp main lobe in general and excellent time autocorrelation properties in particular.

Index Terms— Information theory, waveform design, mutual information, Bayes decision theory

1. INTRODUCTION

The use of information theory to design waveforms for radar systems was first investigated in [1]. In that work, Bell solved two waveform design problems, named as *optimal target detection* and *optimal information extraction* or *optimul estimation* solutions. Signal to noise ratio (SNR) at the output of the receiver filter was maximized for the former while for the later, maximization of mutual information (MI) between the target impulse response and received signal is performed. It was reported that while the optimal target detection solution places as much energy as possible in the largest target scattering mode, the optimal information extraction distributes the energy among the target scattering modes in order to maximize the MI, which is referred to as the waterfilling solution. MI and SNR or minimum mean squared error (MMSE) based designs are probably the two most popular approaches to solve the waveform design problem as reported in the literature, with the former not being as well studied as the later. Even lesser attention has been given to quantify the benefits of MI based designs.

Yang and Blum [2] extended the work by Bell and investigated the design of MIMO radar waveforms using information-theoretic and estimation-theoretic approach. Apart from studying the optimal waveform design problem for estimating extended target's parameters, the authors looked at any possible equivalence that may exist between the information-theoretic and estimation-theoretic approach. They conclude that under total power constraints, the waveform that maximizes the MI also minimizes the MMSE. The optimal solution also employs the waterfilling, so the transmitted power is allocated to frequency bins where stronger target scattering is expected. A relation that is developed in [3] between the MMSE and MI is proved in the paper in the radar waveform design context as well. In [5], Leshem *et al.* extend the water filling approach to multiple extended targets. The authors are primarily interested in MI maximization solution for multiple extended targets under total power constraint. Waveforms are designed for simultaneously estimating and tracking parameters of multiple targets using insights from multiuser information theory. The work in [1] is considered and expanded to solve the problem of waveform design for multiple targets using information theory. We would note that both works did not consider Bayes context while formulating their respective problems.

In Goodman et al. [6], adaptive waveform design for target recognition problem is studied. Waveform design is integrated with sequential hypothesis testing (SHT) framework in bayes context. Under SHT, a decision is made to select a hypothesis after each observation, or to make another observation if a hypothesis cannot be selected with sufficient confidence. It is pointed out that while exact formulation of SNR maximizing waveform design and MI maximizing waveform design is not presented under Bayes context, they are still intuitively satisfying. Sowelam and Tewfik addressed the information theoretic based waveform design problem in [7] in target classification context for two cases. *Kullback Leibler information (KLI)*, which measures the dissimilarity between the observed target and the alternative targets, is used as objective function for adaptive waveform design. Unfortunately, the results of [7] are not easily extended to the M-class problem when $M > 2$. MI and KLIN were also used for waveform design in [8].

Briles [4] studied the related problem of target identification using Rate-Distortion theory and was able to derive bounds on error probability and mutual information by modeling the target identification problem as a communication systems problem. The performance bounds were derived by defining a new Bayes rate-distortion function where a target may belong to any one of M target classes.

Our primary objective in this work is to study the following question: What does mutual information maximization buy us in radar target classification? While few works such as [2], [4] have addressed the problem in radar context and [3] in a more general setting, they were either not interested in Bayes classification context and/or the efforts were largely concentrated on analyzing MMSE or error probability performance of MI based designs. We are rather interested in addressing the question posed earlier by investigating the delay-Doppler resolution performance of such a design. There are two contributions of this work: first, we formulate and solve MI maximizing waveform design problem in Bayes context, which has not been solved before to the best of our knowledge. An iterative design algorithm is proposed and proved which solves the MI maximization problem. Secondly, we study the delay-Doppler resolution characteristics and present the ambiguity function of the waveforms designed. The ambiguity function is compared with a phase coded waveform such as Barker code of similar time-bandwidth product to understand the benefits of information-theoretic design.

The rest of the paper is as follows: the two main theorems of the paper are presented in section II and section III, where the first summarizes the MI based waveform design and the second outlines the SNR based waveform design, respectively. The delay-Doppler characteristics of the designs are presented in section IV where it is compared with that of Barker code, following which we conclude in section V.

2. INFORMATION-THEORETIC DESIGN

Consider a target classification problem where a target present in the environment may belong to one of the two target classes, whose prior probabilities are known. The finite random *target impulse response* of length L for each target class is modeled as an impulse response matrix similar to [7] and [2], denoted by $\mathbf{G}_0$ and $\mathbf{G}_1$. The elements of these matrices are Gaussian distributed with different means and the same variance. The transmitted radar signal is represented by the discrete waveform $\mathbf{x}$. The target will spread $\mathbf{x}$ according to its *target impulse response*, $\mathbf{G}_0$ and $\mathbf{G}_1$. Since the target present may belong to any of the two classes, the received signal by the radar can be written, under the two hypothesis, as

$$\begin{array}{ll} H_0: & \mathbf{y} = \mathbf{G}_0\mathbf{x} + \mathbf{n}, \\ H_1: & \mathbf{y} = \mathbf{G}_1\mathbf{x} + \mathbf{n}, \end{array} \tag{1}$$

where the received vector is corrupted by Gaussian noise $\mathbf{n}$, which has zero mean and covariance matrix $\Sigma_n = \sigma^2\mathbf{I}$. The information theoretic radar waveform design, that maximizes the MI, $I\left(\mathbf{y};\mathbf{G}|\mathbf{x}\right)$, can be summarized in the theorem below.

Theorem 1. *Assume that $\mathbf{x}$ is a finite energy waveform with energy E_x and that the target present in the environment can be characterized by target impulse response $\mathbf{G_0}$ or $\mathbf{G_1}$. Consider the hypothesis testing problem as presented in (1).*

Then the mutual information (MI) maximization problem can be written as follows.

$$\begin{array}{ll} \max & -\left(\sum\limits_{i=0}^{1} \alpha p\left(H_i\right) e^{-F_i(\mathbf{x},\mathbf{y})}\right) \\ & \qquad \log\left(\sum\limits_{i=0}^{1} \alpha p\left(H_i\right) e^{-F_i(\mathbf{x},\mathbf{y})}\right) \\ \text{subject to} & \qquad \mathbf{x}^T\mathbf{x} \le E_x, \end{array} \tag{2}$$

where $F_i(\mathbf{x},\mathbf{y}) = (\mathbf{y}-\mathbf{G}_i\mathbf{x})^T(\mathbf{y}-\mathbf{G}_i\mathbf{x})/2\sigma^2$ and $\alpha = 1/\left(2\pi\sigma^2\right)^{N/2}$. The optimum transmission waveform $\mathbf{x}$ that maximizes the mutual information satisfies the following iterative equation:

$$\mathbf{x} = -\sum_{i=0}^{1}\left(1/\left(2\pi\sigma^2\right)^{N/2}\right)p\left(H_i\right) e^{-(\mathbf{y}-\mathbf{G}_i\mathbf{x})^T(\mathbf{y}-\mathbf{G}_i\mathbf{x})/2\sigma^2}\mathbf{G}_i(\mathbf{y}-\mathbf{G}_i\mathbf{x})/\sigma^2. \tag{3}$$

Proof. The mutual information between the received signal $\mathbf{y}$ and target impulse response $\mathbf{G}$ can be written as follows.

$$\begin{aligned} I\left(\mathbf{y};\mathbf{G}|\mathbf{x}\right) &= H\left(\mathbf{y}|\mathbf{x}\right) - H\left(\mathbf{y}|\mathbf{G},\mathbf{x}\right) \\ &= H\left(\mathbf{y}|\mathbf{x}\right) - H\left(\mathbf{n}\right). \end{aligned} \tag{4}$$

So maximizing mutual information is equivalent to maximizing entropy of $\mathbf{y}$, $H\left(\mathbf{y}|\mathbf{x}\right)$, which is given by

$$\begin{aligned} & H\left(\mathbf{y}|\mathbf{x}\right) \\ & = -\int\limits_{\mathbf{y}\in Y}\left(\sum_{i=0}^{1} p\left(H_i\right)p\left(\mathbf{y}|H_i\right)\right)\log\left(\sum_{i=0}^{1} p\left(H_i\right)p\left(\mathbf{y}|H_i\right)\right)\,d\mathbf{y}. \end{aligned} \tag{5}$$

Maximizing the entropy is therefore equivalent to maximizing $\phi(\mathbf{x},\mathbf{y})$ with respect to $\mathbf{x}$ for each $\mathbf{y}\in Y$, where

$$\begin{aligned} & \phi(\mathbf{x},\mathbf{y}) \\ & = -\left(\sum_{i=0}^{1} p\left(H_i\right)p\left(\mathbf{y}|H_i\right)\right)\log\left(\sum_{i=0}^{1} p\left(H_i\right)p\left(\mathbf{y}|H_i\right)\right) \\ & = -\left(\sum_{i=0}^{1} \alpha p\left(H_i\right)e^{-F_i(\mathbf{x},\mathbf{y})}\right)\log\left(\sum_{i=0}^{1} \alpha p\left(H_i\right)e^{-F_i(\mathbf{x},\mathbf{y})}\right), \end{aligned} \tag{6}$$

where α and $F_i(\mathbf{x},\mathbf{y})$ are given in Theorem 1. The optimization problem that maximizes the mutual information between the received vector and target impulse response then becomes,

$$\begin{array}{ll} \max & -\left(\sum_{i=0}^{1}\alpha p\left(H_i\right)e^{-F_i(\mathbf{x},\mathbf{y})}\right)\cdot \\ & \qquad \log\left(\sum_{i=0}^{1}\alpha p\left(H_i\right)e^{-F_i(\mathbf{x},\mathbf{y})}\right) \\ \text{subject to} & \qquad \mathbf{x}^T\mathbf{x}\le E_x. \end{array} \tag{7}$$

The optimization problem can then be solved using Lagrange multipliers. We omit the details becausee of space limitations. After solving the optimization problem, we get,

$$\begin{aligned} &\sum_{i=0}^{1}\alpha F'_i(\mathbf{x},\mathbf{y})p\left(H_i\right)e^{-F_i(\mathbf{x},\mathbf{y})} \\ &\qquad = \tfrac{1}{E_x}\mathbf{x}^T\left(\sum_{i=0}^{1}\alpha F'_i(\mathbf{x},\mathbf{y})p\left(H_i\right)e^{-F_i(\mathbf{x},\mathbf{y})}\right)\mathbf{x}, \end{aligned} \tag{8}$$

where $F'_i(\mathbf{x},\mathbf{y}) = -\mathbf{G}_i(\mathbf{y}-\mathbf{G}_i\mathbf{x})/\sigma^2$. With the received vector $\mathbf{y}$ known, the optimul transmission waveform $\mathbf{x}$ that maximizes the mutual information is the solution of (8). It can be easily shown that if

$$\mathbf{x} = \sum_{i=0}^{1}\alpha F'_i(\mathbf{x},\mathbf{y})p\left(H_i\right)e^{-F_i(\mathbf{x},\mathbf{y})}, \tag{9}$$

then (8) is satisfied. Therefore the iterative equation which solves the optimization problem in (7) and gives the optimal information-theoretic waveform $\mathbf{x}$ can be written as,

$$\begin{aligned} \mathbf{x} = -\sum_{i=0}^{1}&\left(1/\left(2\pi\sigma^2\right)^{N/2}\right)p\left(H_i\right) \\ &e^{-(\mathbf{y}-\mathbf{G}_i\mathbf{x})^T(\mathbf{y}-\mathbf{G}_i\mathbf{x})/2\sigma^2}\mathbf{G}_i(\mathbf{y}-\mathbf{G}_i\mathbf{x})/\sigma^2. \end{aligned} \tag{10}$$

This concludes the proof. ☐

The information theoretic algorithms can be interpreted as learning algorithms. The structure of the MI maximizing waveform in (10) corroborates this interpretation and provides an adaptive waveform design methodology. With the received signal $\mathbf{y}$ known, the iterative solution has the capability of adapting and designing transmit waveforms by accounting for a change in environment.

3. SNR BASED WAVEFORM DESIGN

In this section, we are going to present SNR based waveform design for comparison purposes. With the same system model as in the previous section, consider the hypothesis testing problem as presented in (1). Then the waveform design which maximizes the SNR, or minimize the error probability, can be summarized in the following theorem.

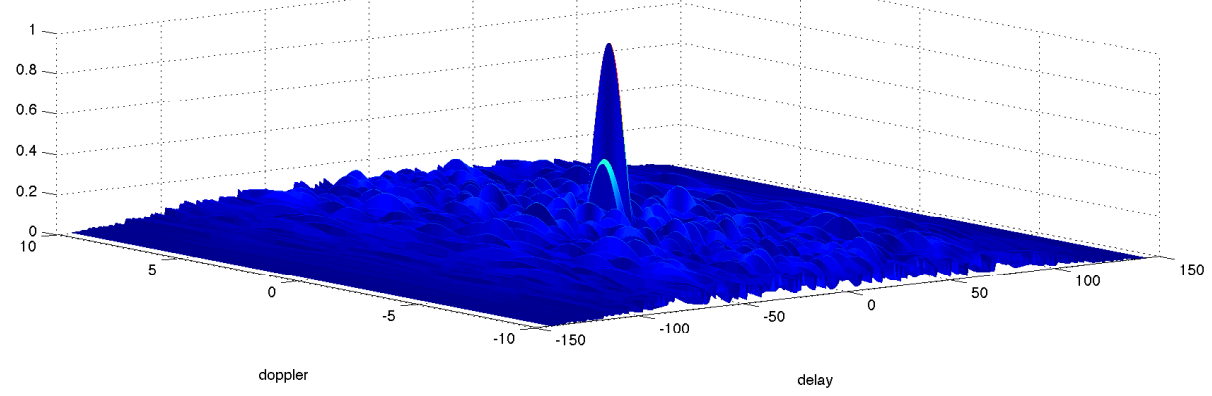

Fig. 1. Ambiguity function of information theoretic waveforms based on Theorem 1

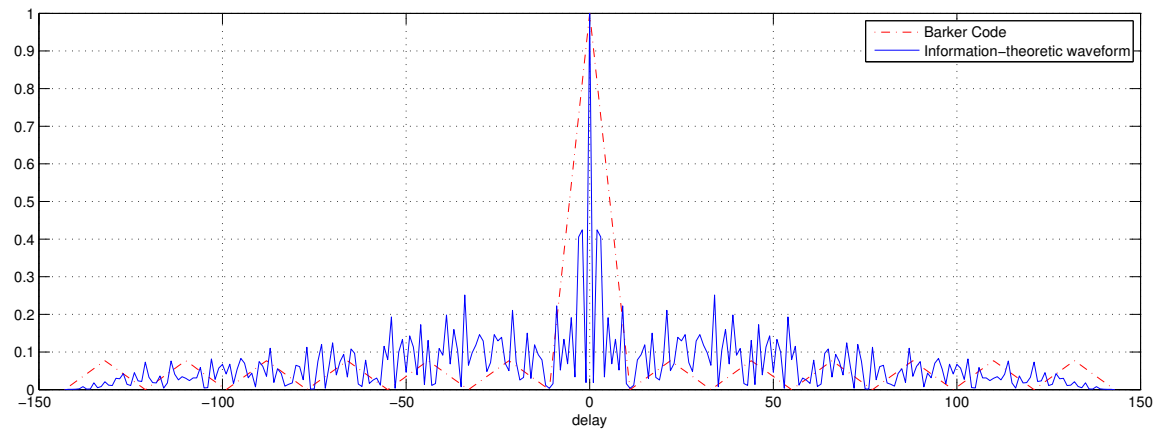

Fig. 2. Time autocorrelation of information theoretic waveforms and Barker code

Theorem 2. *Assume that* $\mathbf{x}$ *is a finite energy waveform with energy* E_x *and that the target present in the environment can be characterized by target impulse response* $\mathbf{G_0}$ *or* $\mathbf{G_1}$*. Consider the hypothesis testing problem as presented in (1). Then the optimization problem which will maximize SNR, or minimize error probability can be formulated as follows:*

$$\begin{array}{cc} \max & \mathbf{x}^T(\mathbf{G}_0-\mathbf{G}_1)^T\boldsymbol{\Sigma}_n^{-1}(\mathbf{G}_0-\mathbf{G}_1)\mathbf{x} \\ \text{subject to} & \mathbf{x}^T\mathbf{x}\le E_x, \end{array} \tag{11}$$

and the solution to the above optimization problem, or the optimal waveform which maximizes SNR is the eigenvector associated with the largest eigenvalue of

$$(\mathbf{G}_0-\mathbf{G}_1)^T\boldsymbol{\Sigma}_n^{-1}(\mathbf{G}_0-\mathbf{G}_1). \tag{12}$$

Proof. We are going to provide a sketch of proof because of space limitations. Using the fact that the performance of maximum likelihood detector can be maximized by maximizing the deflection coefficient, the optimization problem in (11) can be obtained.

$$\begin{aligned} d^2 &\triangleq \tfrac{(E(T(\mathbf{y})|H_0)-E(T(\mathbf{y})|H_1))^2}{\mathrm{var}(T(\mathbf{y}))} \\ &= \tfrac{\left(\mathbf{x}^T\mathbf{G}^T\boldsymbol{\Sigma}_n^{-1}(\mathbf{G}_0-\mathbf{G}_1)\mathbf{x}\right)^2}{\mathbf{x}^T\mathbf{G}^T\boldsymbol{\Sigma}_n^{-1}\mathbf{G}\mathbf{x}} \\ &= \tfrac{\left(\mathbf{x}^T\mathbf{G}^T\boldsymbol{\Sigma}_n^{-1}\mathbf{G}\mathbf{x}\right)^2}{\mathbf{x}^T\mathbf{G}^T\boldsymbol{\Sigma}_n^{-1}\mathbf{G}\mathbf{x}} \\ &= \mathbf{x}^T\mathbf{G}^T\boldsymbol{\Sigma}_n^{-1}\mathbf{G}\mathbf{x} \end{aligned} \tag{13}$$

where $\mathbf{G} = \mathbf{G}_0-\mathbf{G}_1$. Thi is equivalent to maximizing the difference of means of received signal under the two hypothesis while minimizing the variance. Lagrange multiplier method can then be applied to obtain the optimal waveform. ☐

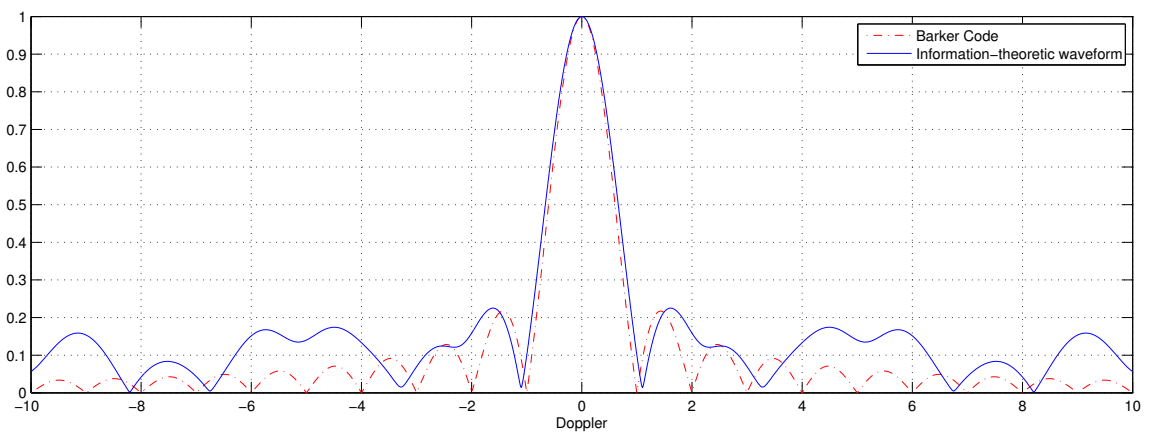

Fig. 3. Doppler cut of information theoretic waveforms and Barker code (at zero delay)

4. AMBIGUITY FUNCTION AND RESOLUTION CHARACTERISTICS OF INFORMATION THEORETIC WAVEFORMS

In this section, we are going to discuss the ambiguity function and resolution characteristics of the waveforms designed in the previous section in the information theoretic context and compare them with that of phase coded sequences such as the Barker code. We design a 143 sample information-theoretic waveform using (10) for SNR of 7 dB and construct a concatenated Barker code of the same size by using a 13- and 11-length Barker code. The information-theoretic waveforms are designed assuming that the target present in the environment has a target impulse response of length 5 which is generated from Gaussian distribution while both hypothesis are equally likely.

Fig. 1 shows the ambiguity function of the information theoretic waveforms which result out of Theorem 1. It can be observed that the ambiguity function has a very sharp main lobe with low side lobes. In particular, the information-theoretic waveforms exhibit excellent time-autocorrelation properties. Since phase coded sequences are known to have good range performance, we compare the time-autocorrelation of the designed waveforms with that of Barker code in Figure 2. The waveforms designed have a narrower range main lobe compared to Barker codes, which on the other hand have better range side lobe performance. Similarly, the Doppler cut (at zero delay) is presented in Fig. 3 where it can be seen that the main lobe of information-theoretic waveforms matches closely with that of Barker code, which however, have better side lobe performance. Although phase code sequences like Barker codes have good range performance, it is widely known that their performance degrades with non-negligible Doppler. The ambiguity functions of information-theoretic waveforms and Barker codes are presented in Fig. 4 and Fig. 5 where it can be seen that information-theoretic waveform perform extremely well for non-negligible Doppler, a situation where other phase coded sequences perform poorly. The peak side lobe for the ambiguity function of information-theoretic waveforms is about 12 dB lower than the main lobe whereas if you see Fig. 5, it can be observed that the peak side lobe for Barker code is about 4.7 dB lower than the main lobe. It must be noted that we intend to investigate the performance of our waveform design with other known codes of good delay-Doppler performance too. Barker codes are chosen for illustrative purposes and the comparison serves as proof of concept here.

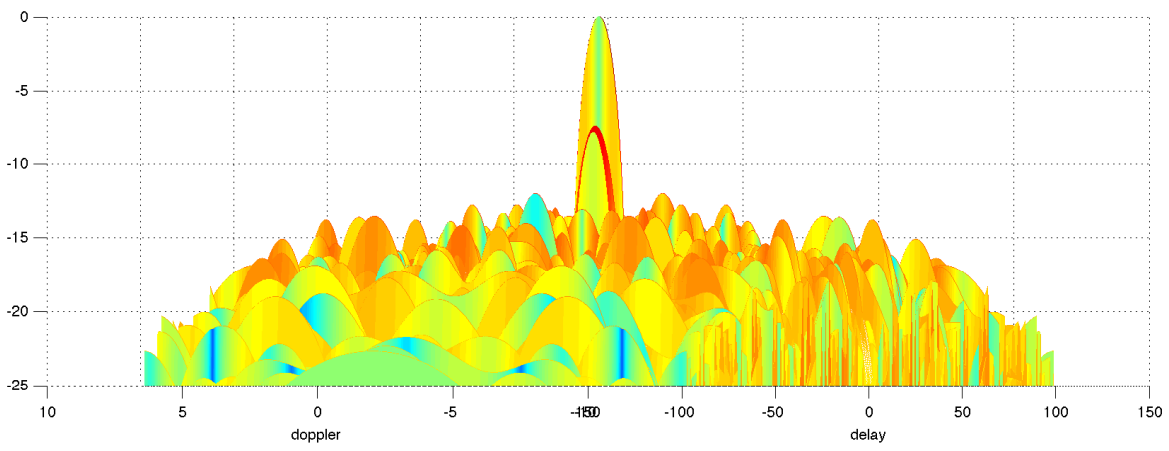

Fig. 4. Ambiguity function of information theoretic waveforms in dB scale

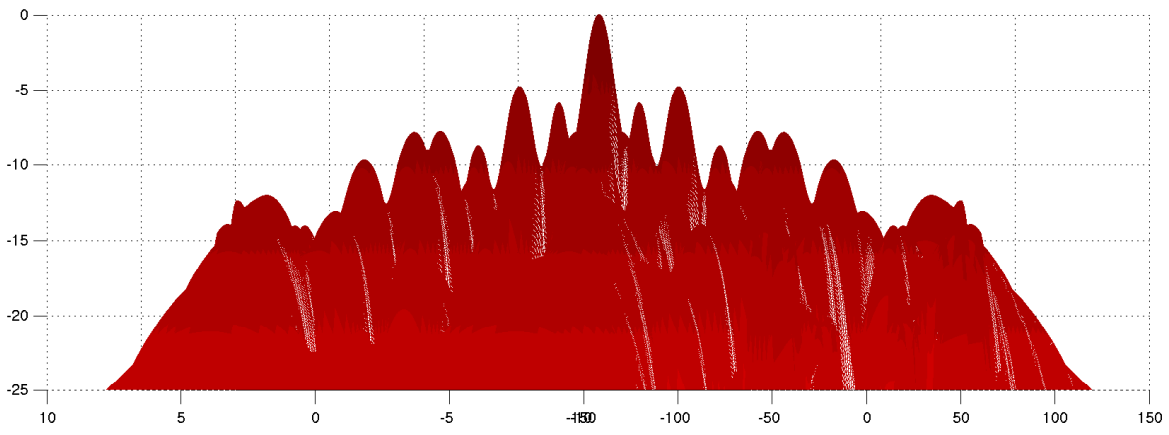

Fig. 5. Ambiguity function of Barker code in dB scale

5. CONCLUSIONS

In this work, we have studied the problem of designing information-theoretic waveforms in Bayes context. We write the hypothesis testing problem by assuming that the target present belongs to one of two classes where the priors are known. We calculate the mutual information between the return and random target impulse response and set up an optimization problem which maximizes the mutual information and obtain its solution. A novel iterative design algorithm is derived to obtain waveforms which maximize the mutual information. The information-theoretic designs have gained some interest in the research community in the past few years and this work aimed to present a design algorithm for such waveforms in Bayes context and study the delay-Doppler resolution characteristics of such waveforms. We compare the performance of the designed waveforms with that of Barker codes. It is shown that the time-autocorrelation of information-theoretic waveforms has a very sharp main lobe, while the peak side lobe is 12 dB lower than the main lobe, thus providing excellent performance for non-negligible Doppler. The Barker code, on the other hand, has the peak side lobe which is about 4.7 dB lower than its main lobe. This gives a strong case for further studying information-theoretic designs and establish their performance in multiple target scenarios.

6. REFERENCES

[1] M. R. Bell, Information Theory and Radar Waveform Design, *IEEE Trans. Info. Theory*, vol. 39, no. 5, Sept. 1993, pp. 1578-1597.

[2] Y. Yang and R. S. Blum, MIMO Radar Waveform Design Based on Mutual Information and Minimum Mean-Square Error Information, *IEEE Trans. Aerosp. Elect. Sys.*, vol. 43, no. 1, pp. 330-343, January 2007.

[3] D. Guo, S. Shamai (Shitz) and S. Verdu, Mutual Information and Minimum Mean-Square Error in Gaussian Channels, *IEEE Trans. Info. Theory*, vol. 51, no. 4, April 2005, pp. 1261-1282.

[4] S. D. Briles, Information-theoretic performance bounding of Bayesian Identifiers, *SPIE Automatic Object Recognition III* vol. 1630, 1993, pp. 256-266.

[5] A. Leshem, O. Naparstek and A. Nehorai, Information Theoretic Adaptive Radar Waveform Design for Multiple Extended Antennas, *IEEE Journal of Selected Topics in Signal Processing.*, vol. 1, no. 1, pp. 42-55, June 2007.

[6] N. A. Goodman, P. R. Venkata and M. A. Neifeld, AdaptiveWaveform Design and Sequential Hypothesis Testing for Target Recognition With Active Sensors, *IEEE Journal of Selected Topics in Signal Processing.* , vol. 1, no. 1, pp. 105-113, June 2007.

[7] S. M. Sowelam and A. H. Tewfik, Waveform Selection in Radar Target Classification, *IEEE Trans. Info. Theory*, vol. 46, no. 3, May 2000, pp. 1014-1029.

[8] Tang, Bo, Jun Tang, and Yingning Peng. ”MIMO radar waveform design in colored noise based on information theory.” *IEEE Transactions on Signal Processing* 58.9 (2010): 4684-4697.